

ZOOMA-FLEX®

CONSTRUCTION

- High strength tapered co-polymer core
- Surface: Tight fibered, formulated paperboard
- Back: Joint tape paper for uniform surface bonding
- Memory free adjustable hinge

DURABILITY

- Uniform structural bonding with corner prevents cracks and callbacks
- Corners will not dent
- Will not separate from wall
- Will withstand significant shifting due to settling, lumber drying, temperature and humidity variations

AESTHETIC QUALITIES


- Perfect angles of any degree every time
- Crisp, sharp lines
- Perfect surface for paint and textures
- Will withstand sanding without surface degradation
- Smoother finish

PACKAGING

- Available in 100' & 200' rolled lengths
- 10 rolls per carton

DIMENSIONS

- Co-polymer center thickness approximately .018"
- Co-polymer edge thickness approximately .017"
- Total Flange width = 1.06"
- Co-polymer flange width = .610"
- Paperboard edge flap = .450"

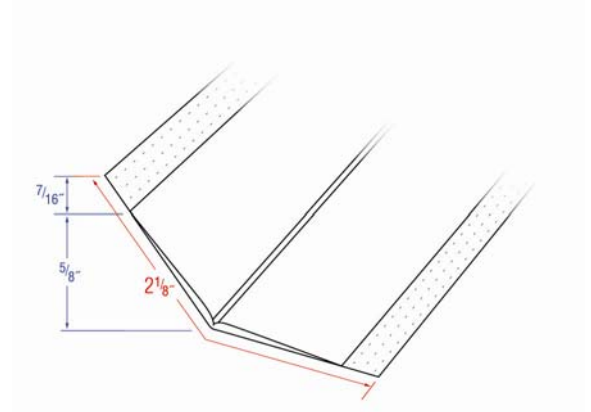

Job Name:
Contractor:
Date: