





LAG-MASTER™

Multi-purpose **Wood Fastener** for

"The self drilling hex head lag screw with muscle to spare!"

General Wood to Wood Construction • Ledger Boards
Laminated Beams • Underdeck Connections
Angles & Brackets • Dimensional Lumber

FREE!
Hex driver bit
Included
in every pack

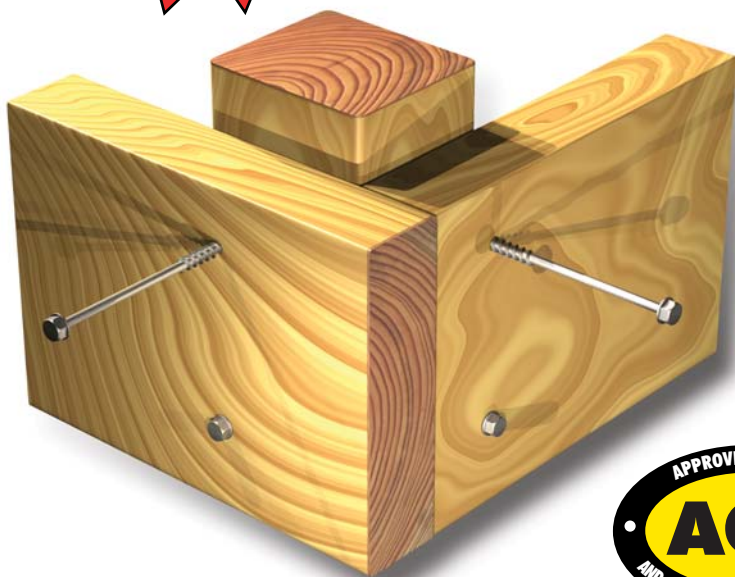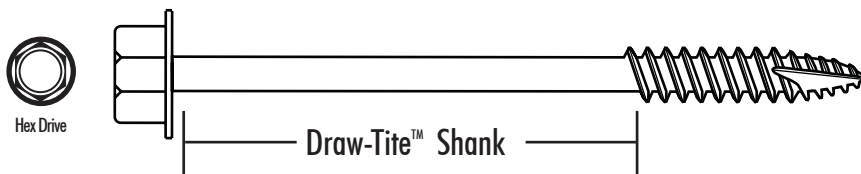

- ▶ **3/8" Hex Drive**
- ▶ **Draw-Tite™ Shank**
Pulls both wood members together for a secure fastening job
- ▶ **Rust Resistant Ceramic Finish**
- ▶ **Self-Drilling Points**
No need to pre-drill

Hex Head Wood Framing Sector Guide

Screw Length	Fastens
2-7/8"	1-1/2"
3-3/8"	1-3/4"
3-5/8"	2"
5-7/8"	3"

Hex Head Wood Framing Packaging

Size	Bulk	Count Pack	Retail Pack
2-7/8"	500	50	20
3-3/8"	500	50	20
3-5/8"	500	50	20
5-7/8"	500	50	20

Performance data: average shear value 2660 lbs. Average pull-out values in 1-3/4" laminated beams is 1640 lbs. with full thread engagement. Average pull-out in construction grade 2 x 4's with full thread engagement is 1468 lbs. for 2-7/8" thru 3-5/8" size screws and 2769 lbs. for 5-7/8" size screw.

Improved performance as shown by shear and pullout values indicates Grabber's advanced design. Ultimate values obtained through INDEPENDENT TESTING. Shear test per SAE 495. Holding power depends on the quality of the lumber material being used. These figures indicate average ultimate values. A safety factor of 4:1 is generally accepted as a safe working load however, reference should always be made to applicable building codes for specific safe working ratios.

Distributed by:



GRABBER®

205 Mason Circle,
Concord CA 94520
1.800.477.TURN