




TIE-MASTER™

The best **Timber Fastener** for

Retaining Walls • Decks • Docks • Boardwalks

"The professionals choice in a selfdrilling timber fastener"

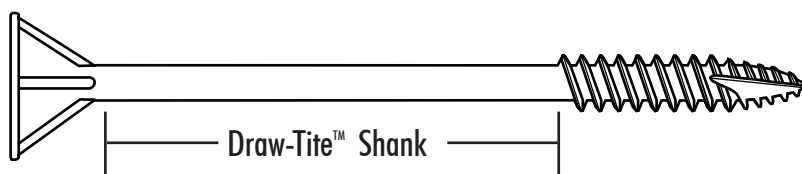

- ▶ **Flat Head Design**
Heads DO NOT protrude above the wood surface
- ▶ **Draw-Tite™ Shank**
Pulls both wood members together for a secure fastening job
- ▶ **Rust Resistant Ceramic Finish**
- ▶ **Self-Drilling Points**
No need to pre-drill
- ▶ **Countersinking Head**
Sits flush to receive next timber

Timber Fastener Sector Guide	
Screw Length	Fastens
4"	2 x 4's
6"	4 x 4's
8"	6 x 6's
10"	8 x 8's

Timber Fastener Packaging			
Size	Bulk	Count Pack	Retail Pack
#14 x 4"	500	50	20
#14 x 6"	500	50	20
#14 x 8"	500	50	20
#14 x 10"	500	50	20

Performance data: average shear value 5900 lbs. Average pull-out value 2950 lbs.

Improved performance as shown by shear and pullout values indicates Grabber's advanced design. Ultimate values obtained through INDEPENDENT TESTING. Shear test per SAE 495. Holding power depends on the quality of the lumber material being used. These figures indicate average ultimate values. A safety factor of 4:1 is generally accepted as a safe working load however, reference should always be made to applicable building codes for specific safe working ratios.

Distributed by:



GRABBER.

205 Mason Circle,
Concord CA 94520
1.800.477.TURN