


ULTRATRIM™ 1/2" L TRIM

CONSTRUCTION

- High strength tapered copolymer core
- Surface: Tight fibered, formulated paperboard
- Back: Joint tape paper for uniform surface bonding

DURABILITY

- Uniform structural bonding with corner prevents cracks and callbacks
- Corners will not dent
- Will not separate from wall
- Will withstand significant shifting due to settling, lumber drying, temperature and humidity variations

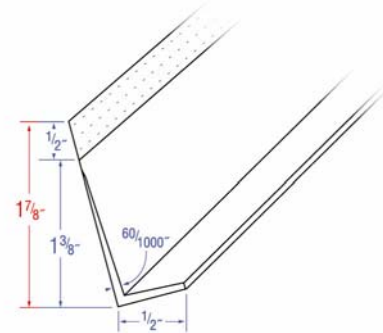

AESTHETIC QUALITIES

- Allows clean installation against finished surfaces
- Crisp, sharp lines
- Perfect surface for paint and textures
- Will withstand sanding without surface degradation
- Smoother finish

PACKAGING

- Available in 8', 9', 10' and 12' lengths
- 50 pieces per carton
- Custom lengths available upon request

DIMENSIONS

- Copolymer center thickness approximately .060"
- Copolymer edge thickness approximately .026"
- Total Flange width = 1.875"
- Copolymer flange width = 1.38"
- Paperboard edge flap = .50"

| |
|-------------|
| Job Name: |
| Contractor: |
| Date: |